

UNITEC CON SPAN 400


Ideal for maintenance operations near power lines, or in environments with high chemical and oxidative aggressiveness and risk areas

Designed to meet Work at Height Regulations

Suitable for Electrical Applications

CERTIFIED:
DIN EN 1004:2005-05
ANSI A10.8
CAN/CSA-S269.2-M87

SERIES:
29"/0,73m Narrow Width
54"/1,37m Double Width
6'-8'-10'/2,00-2,50-3,00m Length

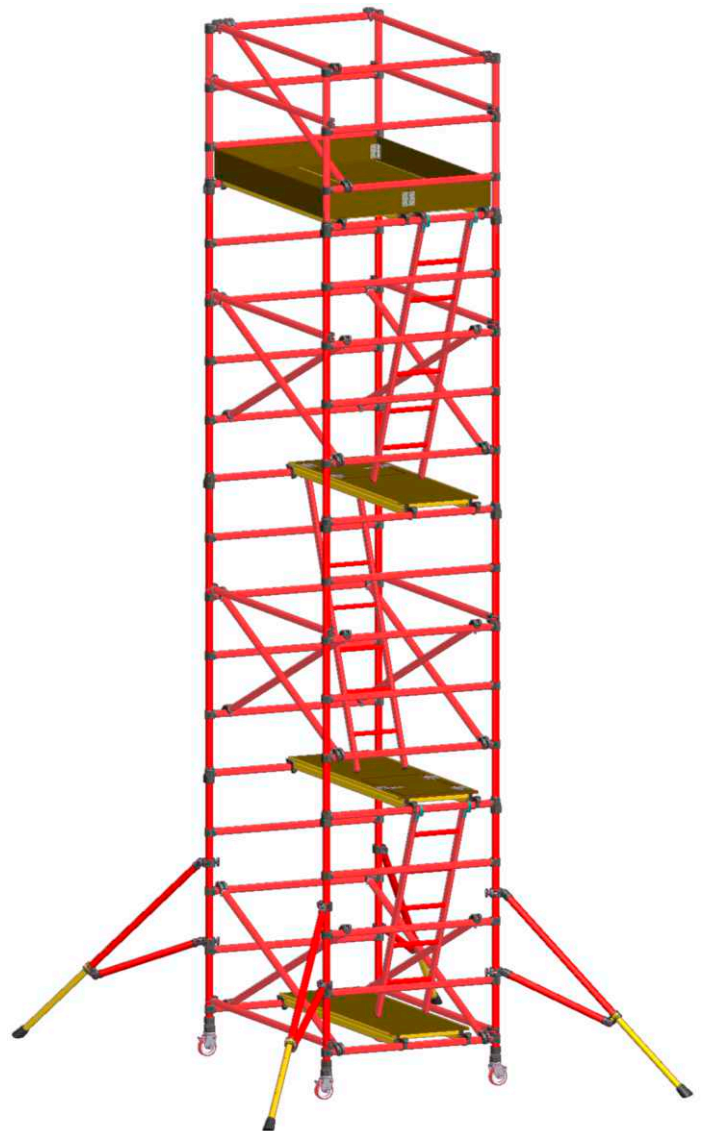


COMPONENTS




Base Plate
cod. BP00




Castor sizes:
cod. 93633 Ø 127mm
cod. 62152 Ø 203mm



Horizontal brace lengths:
2,00m cod. UHB06
2,50m cod. UHB08
3,05m cod. UHB10




Diagonal brace lengths:
2,00m cod. UDB06
2,50m cod. UDB08
3,05m cod. UDB10



Handrail frame lengths :
2,00m cod. U24342 06
2,50m cod. U23996 08
3,05m cod. U14997 10


Narrow Base Frames



cod. UQB2906A
cod. UQB2908A

cod. USB2900A

Narrow Extension Frames

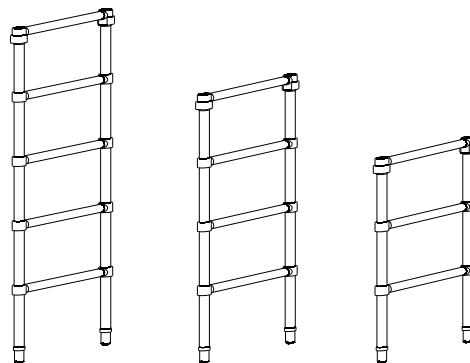


cod. UEX2969A

cod. UEX2956A


cod. UEX2940A

Narrow Guardrail Frames



cod. UGR2937


Double Base Frames

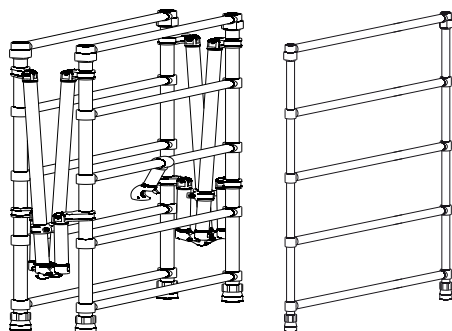

cod. UQB5406A
cod. UQB5408A

cod. USB5400A

Double Extension Frames

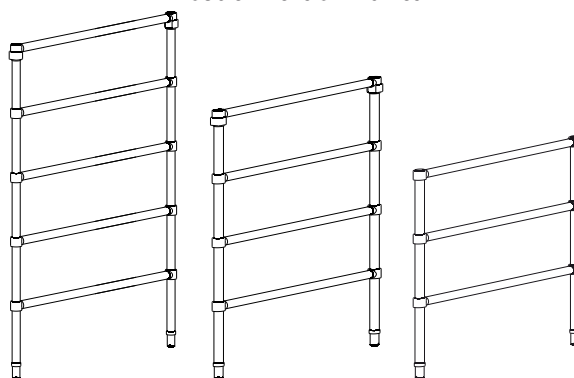


cod. UEX5469A


cod. UEX5456A

cod. UEX5440A


Double Guardrail Frame




cod. UEX5437




cod. UST56




cod. UST69




Large Outrigger
cod. PSX66 GRP




Medium Outrigger
cod. PSR42 GRP




Standard platform lengths:
2,00m – cod. USP06-61
2,50m – cod. USP08-61
2,00m – cod. ASP06-61
2,50m – cod. ASP08-61
3,05m – cod. ASP10-61



Hatch platform lengths:
2,00m – cod. UHP06
2,50m – cod. UHP08
2,00m – cod. AHP06
2,50m – cod. AHP08
3,05m – cod. AHP10



Narrow Toeboard lengths:
2,00m cod. WTB2906
2,50m cod. WTB2908
2,00m cod. ATB2906
2,50m cod. ATB2908
3,05m cod. ATB2910

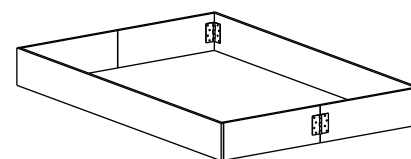

Double Toeboard lengths:
2,00m cod. WTB5406
2,50m cod. WTB5408
2,00m cod. ATB5406
2,50m cod. ATB5408
3,05m cod. ATB5410